

Features

- Up to 15 W continuous power
- DOE Level VI, CEC, ErP Stage 2
- No load power consumption <0.1W
- Universal input voltage range
- Over voltage, over current, and short circuit protections



Electrical Specifications

INPUT

Voltage	90—264 Vac
Current	0.48 A
Frequency	47—63 Hz
Leakage current	3.5 mA

OUTPUT

Output Voltage	5 Vdc
Output Current	3A max
Output Power	15Wmax
Ripple and noise	100mVp-pmax
Efficiency Level	VI
Line regulation	± 6 %
Load regulation	± 5 %
Set point	
Hold up time	10ms
Over voltage protection	Built-in
Over current protection	Built-in
Short circuit protection	Output shutdown, Auto recovery


Environmental

Operating temperature	0— 40°C
Storage temperature	-20— 80°C
Operating humidity (non-condensing)	20— 80%
Storage humidity (non-condensing)	10— 90%
Dimensions	11x50x33mm
Weight (without ac cord)	170g
Inlet plug	IEC320/C14
Input connector	Not supplied
Output connector	2.5mm Standard DC plug
Cable	UL2468, 18AWG
DC Cord length	1,500mm ±30

Safety

Safety approvals	UL/cUL, GS, CE, PSE
EMI/EMC	FCC Part 15B Class B, CE
MTBF	300,000hours (as per Telcordia SR-332,25°C)

Center Positive

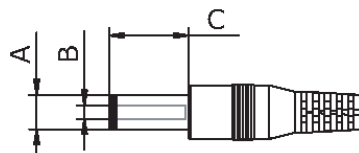

A	B	C	Unit
5.5	2.5	9.5	mm